





Features:

- ❑ Tested to EN1154 - A class certified; For door width and weight maximum of 1200mm and 130kg respectively
- ❑ Tested to 500,000 cycles; 5 years warranty
- ❑ Dual action floor spring with 3 installation adjustments to meet the needs of new and retrofit applications
- ❑ Closing and latching speed adjustments control the door during operation
- ❑ Suitable for -25°C to 40°C
- ❑ Cast iron body with stainless steel cover

Key Technical Specifications

Key Technical Specifications	M5002	M5003	M5004	Mustad 8610	Mustad 9210
Tested to EN1154	Y	Y	Y	Y	Y
500,000 Test cycle (EN)	Y	Y	Y	Y	Y
Maximum Door Weight (kg)	90	110	130	150	250
Maximum Door Width (mm)	1000	1150	1200	1200	1250
Dual Action	Y	Y	Y	Y	Y
Double Cylinder	Y	Y	Y	-	-
Closing and Latching Speed	Y	Y	Y	Y	Y
Hold Open	90/105	90/105	90/105	90/105	90/105
Dimension (cement box L-W-H)	305x108x40.5	305x108x40.5	305x108x40.5	272x83x50	272x83x50

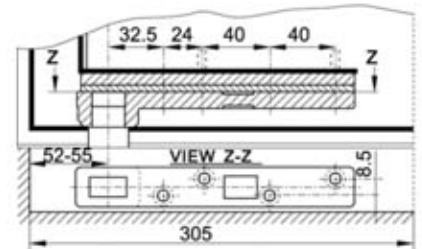

Door Preparation

