


# DÜNSK®



ISO9002

# Door Closer

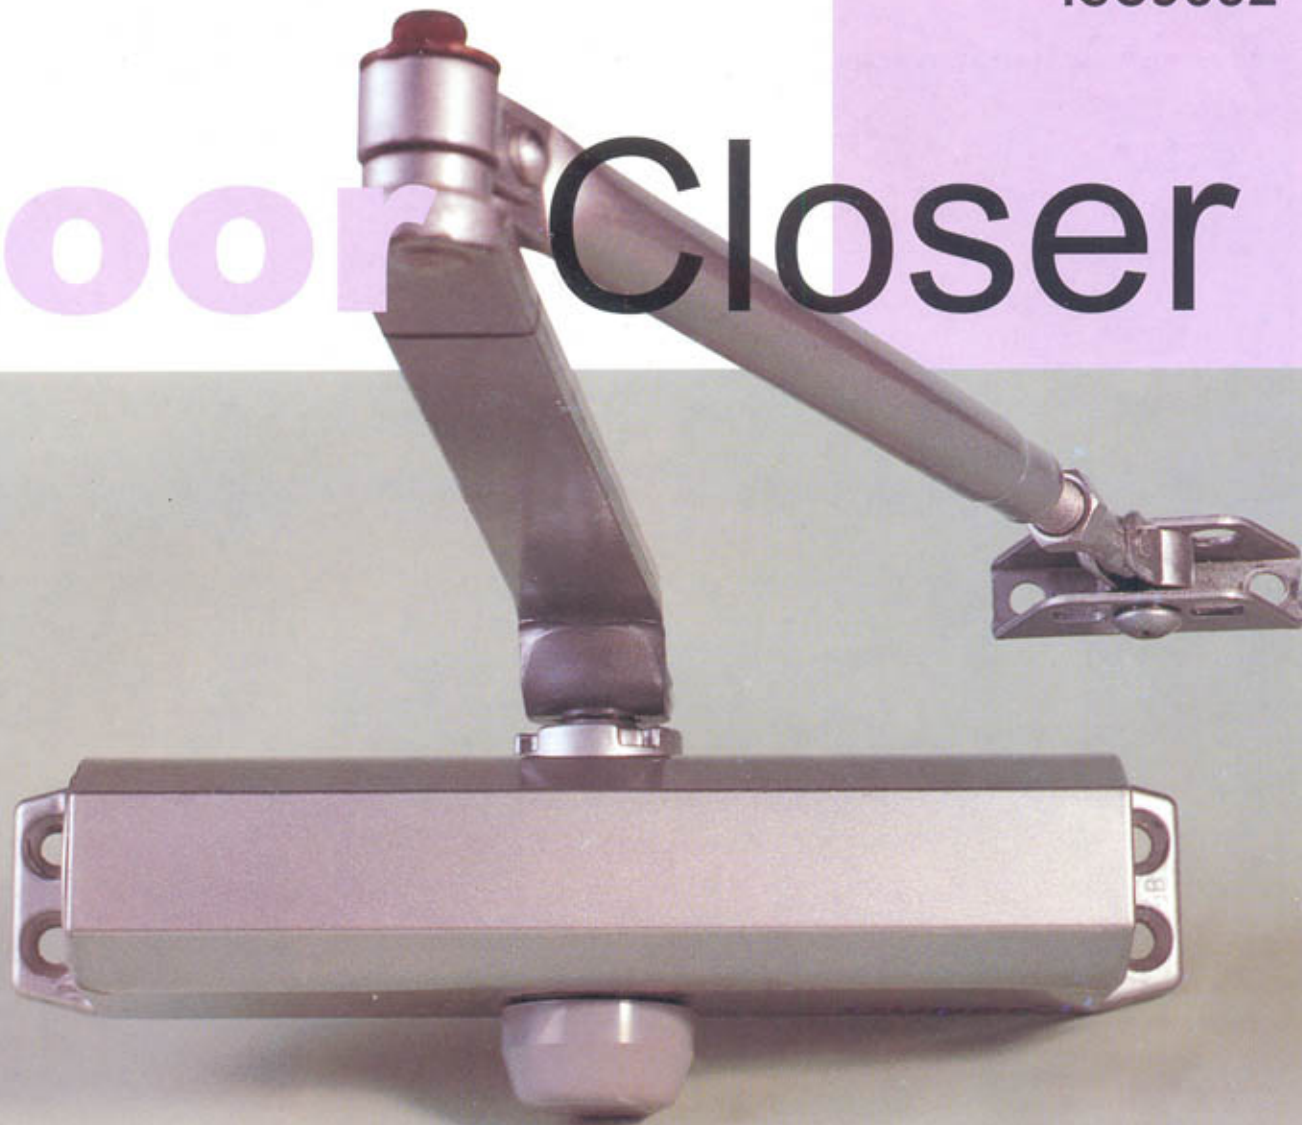

## DK-700 Series



### USAGE DK-700

With a medium-sized (No.3) body, the door closer works softly and smoothly for household doors, building doors, office doors and doors for villas. Installed both on right and left sides. Guaranteed as long as five years.



### DK-700 Series

- Complied with BS EN 1154:1966 of 50,000 cycles
- Suitable for installation to half and one hour fire rated doors
- Eligible for use in Hong Kong Housing Authority (HA) project
- High-grade model for soft movement
- All built-in parts are thermal treated to make them long durable.
- Two valves regulate closing and latching speed.
- Door opening angle: 180 degrees

### Option

- Hold-type: 1700 series
- Parallel type: 700P series
- Hold-open arm: 700S series
- Back check or delayed action: 700BC, 700DA
- Plastic covers: 700C

### Selection Chart

Standard Installation		Parallel Installation		W×H of Door(mm)	Weight of Door(kg)
Non hold-open	Hold-open	Non hold-open	Hold-open		
DK-733	DK-1730	DK-730P	DK-1730P	950×2100	40-65
DK-734	DK-1740	DK-740P	DK-1740P	1050×2400	60-85

Body size: 226×46.3×70.3mm