

king K-70 Series


BODY SIZE: No. 1

USAGE
K-70, K-70C

5

Suitable for lightweight doors such as office doors, compartment doors, and doors made of plywood as the model needs no heavy push. Installation both on the right and left sides is possible. Guaranteed as long as five years.

70 Series (with 2 Valves)

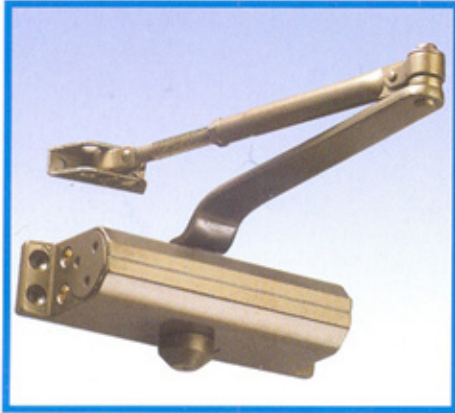

K-70 and K-70C Series


- Closing and latching speed are controlled by two separate speed adjusting valves.
- Four power sizes are available depending on doors weights as indicated in table below
- Door opening angle : 180 degrees
- Diverse colors
- Beautiful plastic covers

Option

- Hold-open type : 170 and 1500 series
- Hold-open arm : 70S and 500S Series
- Back check or delayed action : 70BC and 70DA Series
- Parallel type : 70P Series
- Plastic cover : 70C



70C Series (Cover Used)

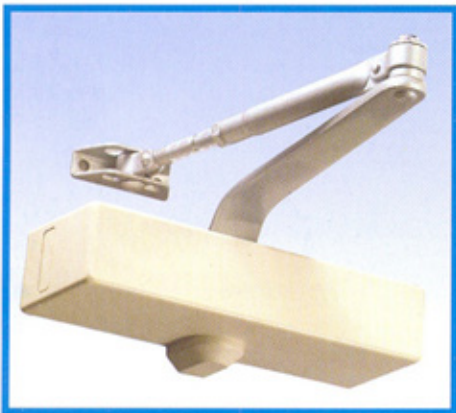

Selection Chart

Body Size No. 1 (181x42x66mm)

Standard Installation		Parallel Installation		W x H of Door(mm)	Weight of Door(kg)
Non Hold-Open	Hold-Open	Non Hold-Open	Hold-Open		
71	171	71P	171P	800 x 1800	10-30
72	172	72P	172P	900 x 2100	25-45
73	173	73P	173P	950 x 2100	40-65
74	174	74P	174P	1050 x 2400	60-85

* Hold-open : Built-in hold open type

Drawing of installation with standard type (Pull side)

(in mm)

